





汽车保险丝 (中号) Auto fuse 32v



尺寸 Dimensions (mm)

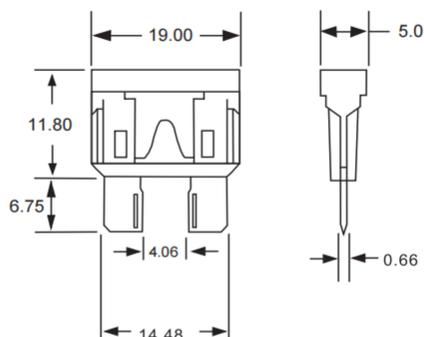

尺寸单位: mm, 误差 ± 0.2mm

规格

分断力: 1000A@32VDC
额定电压: 32 VDC
工作温度范围: -40°C ~ 200°C
端子: 锌合金
外壳材质: 尼龙
符合: SAE J2077
ISO 8820
UL 248 专用熔断器

Specifications

Breaking force: 1000A @ 32VDC
Voltage Rating: 32VDC
Operating Temp Range: -40°C ~ 200°C
Terminals: Ag plated zinc alloy
Housing Material: Nylon
Standards compliant: SAE J2077
ISO 8820
UL248 Special Purpose Fuses

| 目录编号 Catalog No. | 额定电流 Ampere Rating | 额定电压 Voltage Rating | Cold Resistance (冷电阻 ±10%) | 颜色标示 Color Marking |
|---------------------|-----------------------|------------------------|----------------------------|-----------------------|
| Part Number | Current Rating | voltage DC | Cold Resistance | Housing color |
| ADATC-NL1-01 | 1A | 32V | 60.88mΩ | 黑色 Black |
| ADATC-NL1-02 | 2A | 32V | 33.60mΩ | 灰色 Gray |
| ADATC-NL1-03 | 3A | 32V | 23.75mΩ | 紫色 Purple |
| ADATC-NL1-05 | 5A | 32V | 17.75mΩ | 橘黄色 Tan |
| ADATC-NL1-7.5 | 7.5A | 32V | 10.58mΩ | 褐色 Brown |
| ADATC-NL1-10 | 10A | 32V | 7.82mΩ | 红色 Red |
| ADATC-NL1-15 | 15A | 32V | 4.58mΩ | 蓝色 Blue |
| ADATC-NL1-20 | 20A | 32V | 3.21mΩ | 黄色 Yellow |
| ADATC-NL1-25 | 25A | 32V | 2.36mΩ | 自然色 Natural |
| ADATC-NL1-30 | 30A | 32V | 1.58mΩ | 绿色 Green |
| ADATC-NL1-35 | 35A | 32V | 1.5mΩ | 淡绿色 Light greer |
| ADATC-NL1-40 | 40A | 32V | 1.35mΩ | 橙色 Orange |

产品认证:

product certification:



Time-Current Characteristics: 电流时间特征

| %of Rating 额定电流 | Opening Time/熔断时间 | |
|--------------------|-------------------|-----------|
| | MINI | MAX |
| 110 | 4H | / |
| 135 | 0.75s | 10minutes |
| 200 | 0.15s | 5s |
| 350 | 0.080s | |
| 600 | 0.030s | 0.100s |

注: 冷电阻为参考值

时间-电流特性曲线 Time-Current Characteristic Curves

